

SWISSDIS



Swissdis AG
Grasweg 7
CH-4911 Schwarzhäusern

Tel.: +41 62 919 44 00
Fax: +41 62 919 44 01
info@swissdis.ch
www.swissdis.ch



SPECIFICATIONS

Aluminium Electrolytic Capacitors

16SVPC270M Super Low ESR

Version August 2015

The SVPC series is designed as the larger capacitance version of the SVPA series.
Adopt this series to reduce the size of equipment and circuits.
This product can support lead free-reflow.*2



Specifications


Items		Condition		Specifications				
Rated voltage (V)	(V)	-		2.5	4.0	6.3	10	16
Surge voltage (V)	(V)	Room temperature		3.3	5.2	8.2	12	18
Category temperature range (°C)	(°C)	-		-55 to +105				
Capacitance tolerance (%)	(%)	120Hz/20°C		M : ±20				
Dissipation Factor (DF)	(DF)	120Hz/20°C		Please see the attached characteristics list				
Leakage current*1	(I _l)	Rated voltage applied, after 2 minutes		Please see the attached characteristics list				
Equivalent series resistance (ESR)	(ESR)	100kHz/20°C		Please see the attached characteristics list				
Characteristics of impedance ratio at high temp. and low temp.	Based the value at 100kHz, +20°C	-55°C	Z/Z _{20°C}	0.75 to 1.25				
		+105°C	Z/Z _{20°C}	0.75 to 1.25				
Endurance	105°C, 2,000h, Rated voltage applied	ΔC/C	Within ±20% of the initial value					
		DF	Within 1.5 times of the initial limit					
		ESR	Within 1.5 times of the initial limit					
		LC	Within the initial limit					
Damp heat(Steady state)	60°C, 90 to 95%RH, 1,000h, No-applied voltage	ΔC/C	Within ±20% of the initial value					
		DF	Within 1.5 times of the initial limit					
		ESR	Within 1.5 times of the initial limit					
		LC	Within the initial limit (after voltage processing)					
Resistance to soldering heat*2	VPS (230°C X 75s)	ΔC/C	Within ±10% of the initial value (±15% for 2.5V 4.0V)					
		DF	Within 1.3 times of the initial limit					
		ESR	Within 1.3 times of the initial limit					
		LC	Within the initial limit (after voltage processing)					

*1 In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 105°C.

*2 Please refer to page 26 for reflow soldering conditions.

Marking and dimensions

(unit : mm)

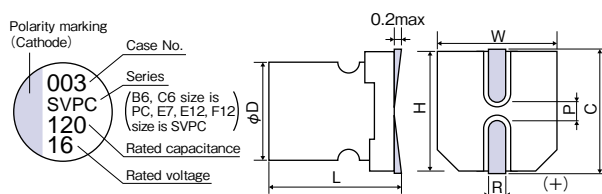

Size code	φD ^{+0.5}	L ^{+0.1 -0.4}	W ^{+0.2}	H ^{+0.2}	C ^{+0.2}	R	P ^{+0.2}
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

Size list

RV : Rated voltage

μF	RV	2.5	4.0	6.3	10	16
39						B6
68					B6	C6
100				B6		C6
120				B6	C6	E7
150			B6			E7
180	B6					
220				C6		
270					E7	E12
330			C6	C6		
390	C6			E7		
560	C6		E7,E12			
680	E7					
820	E12			E12		
1,200			E12			
1,500	E12		E12			
2,700	F12					


SVPC series characteristics list

Size code	Part number	Rated voltage (V)	Rated capacitance (μ F)	ESR (m Ω) (max)		Rated ripple current 100kHz (mA _{RMS}) at 105°C	DF (% max)	Leakage current (μ A)(max) After 2 minutes
				100kHz/20°C	300kHz/20°C*1			
B6	16SVPC39M	16	39	35	30	1820	12	300
	16SVPC39MV	16	39	27	23	2350	12	300
	10SVPC68M	10	68	30	26	1970	12	300
	10SVPC68MV	10	68	23	20	2540	12	300
	6SVPC100M	6.3	100	30	26	1970	12	300
	6SVPC100MY	6.3	100	25	21	2150	12	300
	6SVPC120MV	6.3	120	21	18	2660	12	300
	4SVPC150M	4.0	150	30	26	1970	12	300
	4SVPC150MY	4.0	150	23	20	2240	12	300
	4SVPC150MV	4.0	150	20	17	2730	12	300
	2R5SVPC180M	2.5	180	30	26	1970	12	300
	2R5SVPC180MY	2.5	180	24	20	2200	12	300
	2R5SVPC180MV	2.5	180	19	16	2800	12	300
C6	16SVPC68M	16	68	30	26	2200	12	300
	16SVPC68MV	16	68	25	22	2440	12	300
	16SVPC100M	16	100	24	23	2490	12	300
	10SVPC120M	10	120	27	23	2320	12	300
	10SVPC120MV	10	120	22	19	2600	12	300
	6SVPC220M	6.3	220	27	23	2320	12	300
	6SVPC220MV	6.3	220	15	13	3160	12	300
	6SVPC330M	6.3	330	17	15	3390	12	415
	4SVPC330M	4.0	330	27	23	2320	12	300
	4SVPC330MY	4.0	330	21	18	2630	12	300
	4SVPC330MV	4.0	330	15	13	3160	12	300
	2R5SVPC390M	2.5	390	25	22	2410	12	300
	2R5SVPC390MV	2.5	390	15	13	3160	12	300
2R5SVPC560M	2.5	560	16	14	3500	12	300	
E7	16SVPC120M	16	120	27	23	2900	12	500
	16SVPC150M	16	150	22	21	3220	12	500
	10SVPC270M	10	270	22	19	3220	12	500
	6SVPC390M	6.3	390	22	19	3220	12	491
	4SVPC560M	4.0	560	22	19	3220	12	500
	2R5SVPC680M	2.5	680	20	17	3370	12	500
E12	16SVPC270M	16	270	16	14	4070	15	864
	6SVPC820M	6.3	820	12	10	4700	15	1033
	4SVPC560MX	4.0	560	9	8	5380	15	500
	4SVPC1200M	4.0	1200	12	10	4700	15	960
	4SVPC1500M	4.0	1500	12	10	4700	15	1200
	2R5SVPC820M	2.5	820	9	8	5380	15	500
2R5SVPC1500M	2.5	1500	10	9	5150	15	750	
F12	2R5SVPC2700M	2.5	2700	12	10	5070	15	1350

*1 The ESR value in 300kHz is a reference one.

Recommended land pattern dimension of PWB

(unit : mm)



Size code	a	b	c
B6	1.4	7.4	1.6
C6	2.1	9.1	1.6
E7	2.8	11.1	1.9
E12	2.8	11.1	1.9
F12	4.3	13.1	1.9

Frequency coefficient for ripple current

Frequency	120Hz \leq f < 1kHz	1kHz \leq f < 10kHz	10kHz \leq f < 100kHz	100kHz \leq f \leq 500kHz
Coefficient	0.05	0.3	0.7	1

