

SWISSDIS



Swissdis AG
Grasweg 7
CH-4911 Schwarzhäusern

Tel.: +41 62 919 44 00
Fax: +41 62 919 44 01
info@swissdis.ch
www.swissdis.ch



SPECIFICATIONS

Aluminium Electrolytic Capacitors

CE/KX-Serie

Version October 2014

CE-KX Series

Low Impedance





- This series has 10 to 20% less impedance with same package than CE-AX series.
- 105°C, 1,000 to 2,000hrs. • Solvent proof (within 2 minutes)

Specifications

Items	Condition	Specifications									
Rated voltage (V)	—	6.3	10	16	25	35	50	63	80	100	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	79	100	125	
Category temperature range (°C)	—	-55 to +105									
Capacitance tolerance (%)	120Hz/20°C	M : ±20									
Dissipation Factor (tan δ)	120Hz/20°C	φ4 to φ6.3	0.24	0.20	0.16	0.14	0.12	0.12	0.10	0.08	0.07
		φ8 to φ16	0.28	0.24	0.20	0.16	0.14	0.14	0.12	0.10	0.08
		When rated capacitance exceeds 1,000 μF, add 0.02 to the value above for each 1,000 μF increase.									
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3									
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z20°C	3	2	2	2	2	2	2	2	2
		-55°C Z/Z20°C	5	4	4	3	3	3	3	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ4 to φ6.3 : 1,000hrs., φ8 to φ16 : 2,000hrs.								
		ΔC/C	Within ±25% of the initial value								
		tan δ	≤ 2 times the initial specified value								
		LC	≤ The initial specified value								

Marking, Dimensions

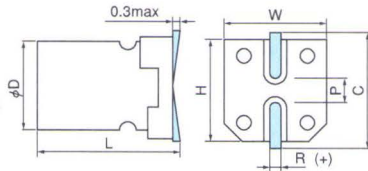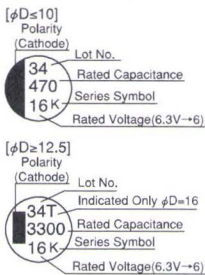

A pressure relief vent is attached to products over φD=8

(Unit : mm)

D ^{+0.5max}	L ^{+0.3}	W ^{+0.2}	H ^{+0.2}	C ^{+0.2}	R	P ^{±0.2}
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6
12.5	13.5 ^{±0.5}	12.8	12.8	13.5	1.0 to 1.4	4.6
16	16.5 ^{±0.5}	16.3	16.3	17.3	1.7 to 2.1	7.0

■ Size List, Impedance, Rated Ripple Current

μF \ V	6.3			10			16			25			35			
4.7													4x6.0	1.45	90	
10													4x6.0	1.45	90	
15							4x6.0	1.45	90		5x6.0	0.70	170	5x6.0	0.70	170
22				4x6.0	1.45	90				5x6.0	0.70	170	5x6.0	0.70	170	
27	4x6.0	1.45	90													
33		→		5x6.0	0.70	170		→		6.3x6.0	0.39	250	6.3x6.0	0.39	250	
47	5x6.0	0.70	170		→		6.3x6.0	0.39	250	6.3x6.0	0.39	250	6.3x6.0	0.39	250	
56	5x6.0	0.70	170							6.3x6.0	0.39	250				
68		→		6.3x6.0	0.39	250	6.3x6.0	0.39	250	6.3x6.0	0.39	250	6.3x7.7	0.30	300	
100	6.3x6.0	0.39	250		→		6.3x6.0	0.39	250	6.3x7.7	0.30	300	8x10.2	0.15	600	
150	6.3x6.0	0.39	250	6.3x6.0	0.39	250	6.3x7.7	0.30	300	6.3x7.7	0.30	300	8x10.2	0.15	600	
220	6.3x6.0	0.39	250	6.3x7.7	0.30	300	6.3x7.7	0.30	300	8x10.2	0.15	600	8x10.2	0.15	600	
330	6.3x7.7	0.30	300	8x10.2	0.15	600	8x10.2	0.15	600	8x10.2	0.15	600	10x10.2	0.080	850	
470	8x10.2	0.15	600	8x10.2	0.15	600	8x10.2	0.15	600	10x10.2	0.080	850	12.5x13.5	0.058	1150	
680	8x10.2	0.15	600		→		10x10.2	0.080	850				12.5x13.5	0.058	1150	
1000	8x10.2	0.15	600	10x10.2	0.080	850				12.5x13.5	0.058	1150	16x16.5	0.035	1800	
1500	10x10.2	0.080	850				12.5x13.5	0.058	1150				16x16.5	0.035	1800	
2200				12.5x13.5	0.058	1150				16x16.5	0.035	1800				
3300	12.5x13.5	0.058	1150				16x16.5	0.035	1800							
4700				16x16.5	0.035	1800										
6800	16x16.5	0.035	1800													

μF \ V	50			63			80			100		
2.2										6.3x6.0	2.70	42
3.3										6.3x6.0	2.40	45
4.7	4x6.0	2.55	64	5x6.0	2.00	55	6.3x6.0	2.40	45	6.3x6.0	2.40	45
10	6.3x6.0	0.52	215	6.3x6.0	1.00	90	6.3x7.7	2.00	65	6.3x7.7	2.00	65
22	6.3x6.0	0.52	215	6.3x7.7	0.80	135	8x10.2	0.90	140	8x10.2	0.90	140
33	6.3x7.7	0.44	243	8x10.2	0.35	280	8x10.2	0.90	140	10x10.2	0.50	220
47	6.3x7.7	0.44	243	8x10.2	0.35	280	10x10.2	0.50	220	12.5x13.5	0.24	500
68							12.5x13.5	0.24	500	12.5x13.5	0.24	500
100	8x10.2	0.22	400	10x10.2	0.20	480	12.5x13.5	0.24	500	16x16.5	0.14	800
150							12.5x13.5	0.24	500	16x16.5	0.14	800
220	10x10.2	0.13	585	12.5x13.5	0.14	800						
330	12.5x13.5	0.10	800				16x16.5	0.14	800			
470				16x16.5	0.065	1410						
1000	16x16.5	0.060	1610									

→ Use next higher voltage product.
Please refer to page 15 for the ripple current frequency coefficient.

Case size: ϕ DxL (mm)
16x16.5:CE-KXT

Rated ripple current
mA_{rms}(100kHz, 105°C)
Impedance(Ω)
max at 100kHz, 20°C

■ Model No.

